

TS series

Proportional miniature thumb controls •
non-contacting Hall effect technology



DISTINCTIVE FEATURES

- One or two axis
- Analog, PWM or USB outputs
- Submersible up to 1 m (3.28 ft)
- Rear or drop-in mounting
- Pushbutton option



ENVIRONMENTAL SPECIFICATIONS

- Operating Temperature: -40 °C to +85 °C (-40 °F to +185 °F)
- Storage Temperature: -40 °C to +85 °C (-40 °F to +185 °F)
- Above Panel Sealing: IP67, IP69K¹ (subject to mounting style & final specifications)
- EMC Immunity Level: EN61000-4-3
- EMC Emissions Level: EN61000-6-3:2001
- ESD: EN61000-4-2



ELECTRICAL SPECIFICATIONS

- Supply Voltage Range: 5.00 V ± 0.250 VDC
- Reverse Polarity max: -10 V
- Transient overvoltage max: 16 V
- Output Impedance: 2Ω
- Return to Center Voltage Tolerance: ± 200 mV initial



MECHANICAL SPECIFICATIONS

- Operating Force: 3.1 N ± 0.5 N (0.70 lbf ± 0.11 lbf)²
- Maximum Vertical Load: 200 N (45 lbf)²
- Maximum Horizontal Load: 150 N (33.7 lbf)²
- Mechanical Angle of Movement: 50° X & Y axis (subject to limiter plate)
- Expected Life: 1 million cycles
- Mass/Weight: 18.25 g ± 5.0 g (0.64 oz ± 0.18 oz)
- Lever Action (centering): Spring

¹ All options are IP68 and IP69K rated, however drop-in mounting does not prevent panel ingress.

² Force applied to the top of the castle cap.

The company reserves the right to change specifications without notice.



TS series

Proportional miniature thumb controls •
non-contacting Hall effect technology



MATERIALS

- Body: Glass filled nylon
- Threaded Housing: Black oxide plated brass
- Boot: Silicone
- Handles:
 - 1, 2, 3, E, F - Glass filled nylon
 - 4, 5, 6, 7, 8 - Silicone
 - B, C, D - Thermoplastic elastomer

APEM products may be recycled at end-of-life for the re-claiming of valuable metal components.



PUSHBUTTON SWITCH (OPTION 6 HANDLE)

- Electrical Life: 100,000 cycles
- Rating: 50 mA, 12 VDC.
- Terminal: Brass with silver plating
- Contact Resistance: 100 mΩ max
- Insulation Resistance: 100 MΩ min. 500 VDC
- Dielectric Strength: 250 VAC /1 minute
- Contact Arrangement: 1 pole 1 throw
- Stop Strength: Max 3 kgf vertical static load for 15 seconds
- Operating Temperature: -25 °C to +70 °C (-4 °F to +158 °F)
- Storage Temperature: -30 °C to +85 °C (-22 °F to +158 °F)
- Vibration Resistance: MIL-STD-202F METHOD 201A
- Shock Resistance: MIL-STD-202F METHOD 213B



CONNECTIONS

WIRING SPECIFICATION (Termination options 1 & 2)	
Black	Ground & button common
Red	Power (5V)
Blue	X axis output (alpha)
Yellow	Y axis output (alpha)
Orange	Pushbutton switch (option 6 handle)
Blue/White Stripe	X axis output (beta)
Yellow/Black Stripe	Y axis output (beta)
Red/White Stripe	Power (5V) (beta)
Black/White Stripe	Ground (beta)



NEW OPTION AVAILABLE

PLASTIC THREADED HOUSING




TS series

Proportional miniature thumb controls •
non-contacting Hall effect technology




MOUNTING

PLASTIC HOUSING - DROP-IN CUTOUT

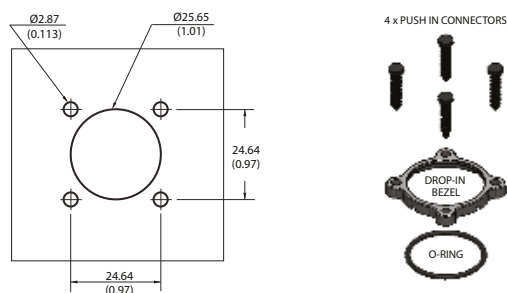


- The under panel depth for the Drop-in configuration is 16.02 mm (0.631 in).

METAL THREADED HOUSING - DROP-IN CUTOUT

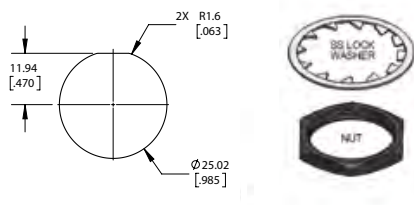


- The under panel depth for the Metal Threaded Housing configuration is 14.55 mm (0.573 in).
- Mounting nut can be tightened to a recommended torque of 10 lbf.

PLASTIC HOUSING - REAR MOUNT OPTION CUTOUT

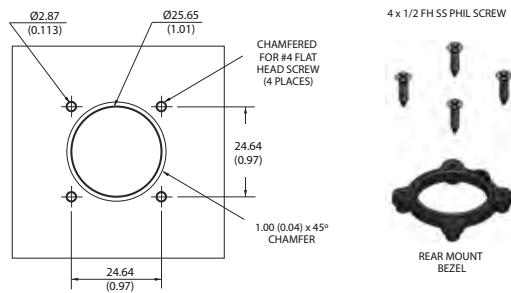

- The maximum panel thickness for the Rear Mount configuration is 2.032 mm (0.08 in).
- Mounting screws can be driven to a recommended torque of 4 lbf.

PLASTIC THREADED HOUSING - DROP-IN CUTOUT

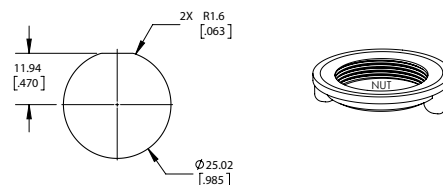

- The under panel depth for the Plastic Threaded Housing configuration is 14.55 mm (0.573 in).
- Mounting nut can be tightened to a recommended torque of 10 lbf.

TS series

Proportional miniature thumb controls •
non-contacting Hall effect technology



BUILD YOUR PART NUMBER

SERIES	HANDLE	MOUNTING OPTIONS	TERMINATION ¹	LIMITER
TS	<div>0</div> None <div>1</div> Castle <div>2</div> Winged Hat <div>3</div> Conical <div>4</div> Finger Tip <div>5</div> Round Jog <div>6</div> Pushbutton <div>7</div> Mushroom* <div>8</div> Low Profile* <div>A</div> Handles 1, 2, 3 <div>B</div> Castle, elastomer <div>C</div> Winged Hat, elastomer <div>D</div> Conical, elastomer <div>E</div> Quadcave <div>F</div> Puck	<div>N</div> None <div>D</div> Drop-in <div>R</div> Rear mount <div>A</div> Drop-in and Rear Mount <div>T</div> Threaded housing, Metal <div>P</div> Threaded housing, Plastic	<div>1</div> 22 AWG 25 cm PTFE <div>2</div> 28 AWG 25 cm PTFE <div>3</div> 72" Overmold Cable with USB Male Type Connector <div>4</div> 2.54 mm (0.100") Pitch TE Connector <div>5</div> 2.54 mm (0.100") Pitch TE Connector with 10" Mating Harness	<div>U</div> Single axis <div>S</div> Square <div>G</div> Guided feel <div>P</div> Plus

OUTPUT OPTIONS	POWER SUPPLY OPTIONS
<div>00</div> 0 V to 5 V <div>01</div> 0.25 V to 4.75 V <div>02</div> 0.5 V to 4.5 V <div>03</div> 1 V to 4 V <div>04</div> 0 V to 5 V - Sensor 1 0 V to 5 V - Sensor 2 <div>05</div> 0.25 V to 4.75 V - Sensor 1 0.25 V to 4.75 V - Sensor 2	<div>06</div> 0.5 V to 4.5 V - Sensor 1 0.5 V to 4.5 V - Sensor 2 <div>07</div> 1 V to 4 V - Sensor 1 1 V to 4 V - Sensor 2 <div>08</div> 0 V to 5 V - Sensor 1 5 V to 0 V - Sensor 2 <div>09</div> 0.5 V to 4.5 V - Sensor 1 4.5 V to 0.5 V - Sensor 2 <div>10</div> 0.25 V to 4.75 V - Sensor 1 4.75 V to 0.25 V - Sensor 2

POWER SUPPLY OPTIONS
<div>11</div> 1 V to 4 V - Sensor 1 4 V to 1 V - Sensor 2 <div>12</div> Customer specified <div>13</div> PWM ² <div>14</div> USB (Game Controller) <div>15</div> Joyball (Cursor emulation)

POWER SUPPLY OPTIONS
<div>A</div> Single <div>B</div> Independent ³

* = Not available with T (threaded housing, metal) or P (threaded housing, plastic)

¹⁻¹ – Wires are thick, robust, and best suited for stand alone applications.

¹⁻² – Wires are thin and best suited for tightly constrained wire routing.

² Contact factory for PWM configuration.

³ Only available on dual output. Not available with Handle 6 (Pushbutton). Not available with termination options 4 or 5.

TS series

Proportional miniature thumb controls •
non-contacting Hall effect technology




PLASTIC HOUSING



METAL THREADED HOUSING



PLASTIC THREADED HOUSING

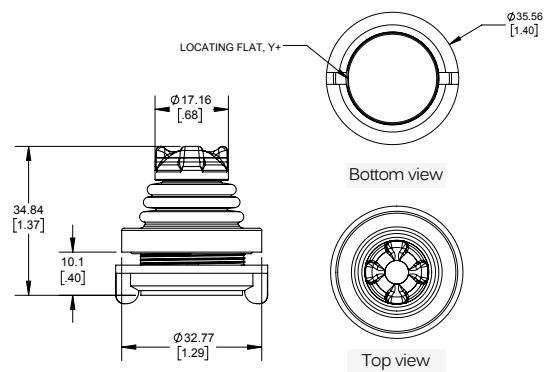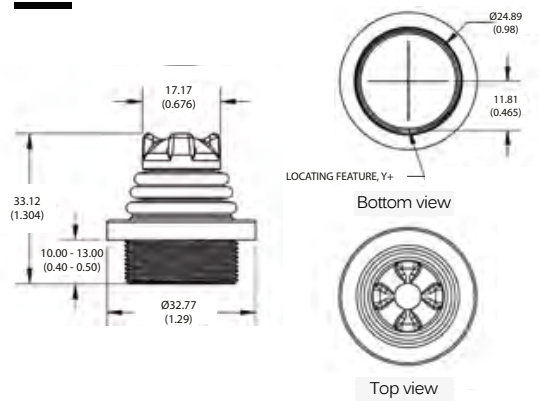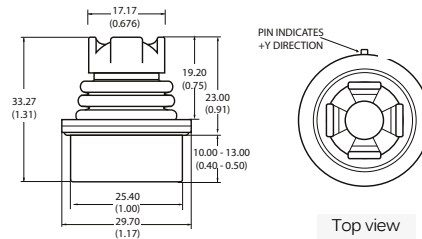


TS series


Proportional miniature thumb controls •
non-contacting Hall effect technology




HANDLE OPTIONS




1 Castle
B Castle (elastomer)




2 Winged hat
B Winged hat (elastomer)




3 Conical
B Conical (elastomer)




4 Fingertip




5 Round jog




6 Pushbutton




7 Mushroom



8 Low profile



E Quadcave



F Puck



USB OPTIONS

USB : GAME CONTROLLER

Featuring USB 2.0 HID compliant interface. APEM's USB joysticks are recognized as standard HID "game controller" devices. Adhering to the HID specification, APEM's USB joysticks are plug-and-play with most versions of Windows. Joystick button and axis assignments are dependent upon the controlled application.

- Features:
 - USB 2.0 HID compliant "game controller" device
 - Easy to install and operate
 - Functions determined by controlled application
- Supplied wiring: USB Male Type A Connector with 72" overmolded cable

USB: JOYBALL (CURSOR EMULATION)

The cursor emulation option converts a multi-axis joystick into a mouse or cursor control device

- Applications: The cursor emulation option is ideal for vehicle applications subjected to dirt and high vibration which makes operating a traditional cursor control device difficult. The Cursor Emulation option is widely used in shipboard and military applications.
- Features:
 - HID compliant "pointing device"
 - Plug-and-play with USB option
- Supplied wiring: USB Male Type A Connector with overmolded cable


**PATENT
PENDING**

TS series


Proportional miniature thumb controls •
non-contacting Hall effect technology




VOLTAGE OUTPUT OPTIONS




Option 00




Option 01




Option 02




Option 03




Option 04




Option 05




Option 06




Option 07




Option 08



Option 09



Option 10



Option 11

—— Sensor 1
- - - - Sensor 2



CONNECTOR TERMINATION OPTION

PINOUT SPECIFICATION		
	TE 3-647166-5	TE 3-647166-7
PIN 1	Y (alpha)	Pushbutton
PIN 2	5 VDC	GND/ Pushbutton common
PIN 3	X (alpha)	X (alpha)
PIN 4	GND/ Pushbutton common	Y (beta)
PIN 5	Pushbutton	Y (alpha)
PIN 6	-	5 VDC
PIN 7	-	X (beta)

- Single output configurations feature a five position TE 3-647166-5 connector.
- Dual output configurations feature a seven position TE 3-647166-7 connector.
- A mating harness is not included, but may be specified for single output configurations at the time of order for an additional charge.
- The five function harness is part number 505-499.
- The seven function harness is part number 505-500.