







356 Series

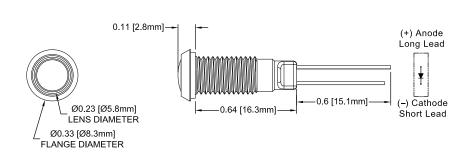




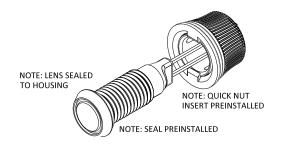



NOTES:

- 1. ROHS COMPLIANT
- 2. MOUNTING HARDWARE SHIPPED NON-ASSEMBLED

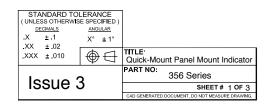















356 Series (Flying Leads version)

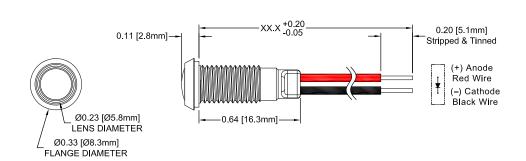



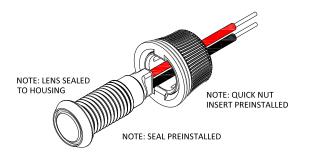




Wire specification: Red - Anode Black - Cathode 24AWG - UL1061

NOTES:

1. ROHS COMPLIANT

2. MOUNTING HARDWARE SHIPPED NON-ASSEMBLED

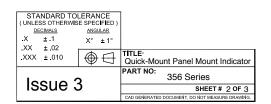











		Peak Wave			Electro-Optical Data @ 20mA			
Marl Part No.	LED Part Number	Length λp(nm)	Emitted Colour	Lens Appearance	Typ Vf (VDC)	Lamp Iv (mcd)	Viewing Angle	Termination
356-308-04								PINS
356-308-04-40	308	610	AMBER	WHITE DIFFUSED	2.0	45	120	12IN FLYING LEADS
356-320-04	320	470	BLUE	WHITE DIFFUSED	4.0	90	120	PINS
356-320-04-40								12IN FLYING LEADS
356-314-04	314	568	GREEN	WHITE DIFFUSED	2.1	14	120	PINS
356-314-04-40								12IN FLYING LEADS
356-305-04	305	645	RED	WHITE DIFFUSED	1.7	18	120	PINS
356-305-04-40								12IN FLYING LEADS
356-311-04	311	585	YELLOW	WHITE DIFFUSED	2.1	14	120	PINS
356-311-04-40								12IN FLYING LEADS

	Marl Part No.	LED Part Number	Colour Temperature	Emitted Colour	Lens Appearance		-Optical 20mA Lamp Iv (mcd)	Viewing Angle	Termination
						TYP	TYP		
Ī	356-998-04	998	5000K	NEUTRAL	WHITE DIFFUSED	3.2	1125	120	PINS
356-998-04-40	330	3000K	WHITE	WITH DITTOOLD	5.2	1123	120	12IN FLYING LEADS	

ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)

 MAXIMUM REVERSE VOLTAGE
 5V

 MAXIMUM POWER DISSIPATION
 150 mW

 OPERATING TEMPERATURE RANGE
 -30°C ~ 85°C

 STORAGE TEMPERATURE
 -40°C ~ 85°C

